

CITRUS SLAM

Powder Prespray with Citrus Solvent




PRESPRAY

Citrus Slam is a high powered D-limonene infused prespray that breaks down soil & grease quickly and easily, delivering amazing results in a variety of applications. With the digestive action of enzymes Citrus Slam effectively removes animal, vegetable & petroleum oils. This product also excels on high traffic areas, leaving heavily soiled carpet completely clean.

- **Dissolves quickly & easily**
- **Active enzymes effectively digest protein soils & grease**
- **Leaves a pleasant citrus scent**
- **Available in: 6.5 lbs (3 kg), 48 lbs (21.8 kg) or 430 lbs (195 kg)**

Fast acting prespray with citrus solvent power.

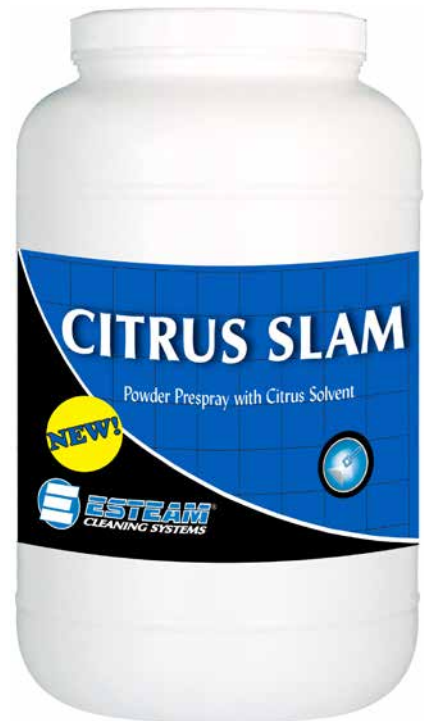

Diluted pH: 12.0
Dilution Ratio: 1:64

DIRECTIONS FOR USE:

Pretest in an inconspicuous location for color fastness and fibre stability

Pump up sprayer:

For Light Soil Conditions: Mix 2 oz of Citrus Slam into 1 gal (3.78 L) of warm to hot water. Mix until completely dissolved (1:64 Dilution).

For Heavy Soil Conditions: Mix 4 oz of Citrus slam into 1 gal (3.78 L) of warm to hot water. Mix until completely dissolved (33:1 dilution)

Hydro-Force™ Sprayer:

1:8 dilution: Mix 12 oz of Citrus Slam into a Hydro-Force™ jug and fill with warm. Shake until completely dissolved.

For best results: Pile lift or vacuum carpet prior to cleaning. Spray diluted Citrus Slam prespray onto carpet at the rate of 800-1000 square feet per gallon (3.78 L). Agitate presprayed area using a carpet groomer. Allow 10 minutes dwell time, then rinse with Esteam Fibre Rinse solution in conjunction with hot water extraction.

Caution: Product not recommended for use on wool or natural fibres

Note: Do not mix Esteam Citrus Slam with any other product.

This product is sold by weight not volume. Settling may occur during shipping and handling.

Keep this product out of reach of children. Read the Material Safety Data Sheet and the Product Label before using. Take the necessary precautions dictated by the label to ensure that your health and that of your customers' is protected.

www.esteem.com



1-800-653-8338

See Material Safety Data Sheet at www.esteem.com/msds.php